
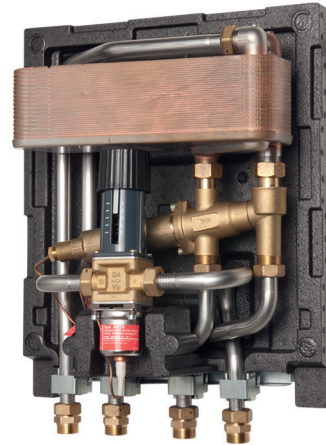


Fact sheet

Termix One-B with complete insulation

Instantaneous water heater for flats, single-family houses and small apartment buildings with up to 4 flats

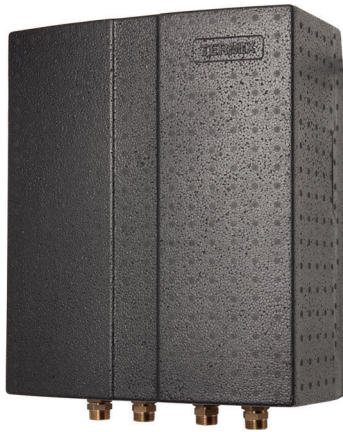

Application

The Termix One is an instantaneous water heater featuring superb heat extraction and high performance. The Termix One is suitable for flats, single-family houses as well as for small apartment buildings with up to 4 apartments. The water heater is available in two sizes, either for 1 apartment or for 1-4 apartments. The Termix One is applicable for decentralized heating systems – as well as for district heating networks with summer operation at low temperatures or changes in differential pressure. The Termix One heat exchanger cools the district heating water very efficiently, thereby creating a very good operation economy.

Domestic hot water (DHW)

The domestic hot water is prepared in the heat exchanger and the temperature is regulated with a thermostatic control valve. The patented sensor accelerator accelerates the closing of the Danfoss AVTB valve and protects the heat exchanger against overheating and lime scale formation. The sensor

accelerator and AVTB valve also works as a bypass keeping the house supply line warm. This shortens the waiting periods during summer when the heating system is in reduced operation. The sensor accelerator helps to ensure a stable hot water temperature by varying loads, flow temperatures and differential pressure without the need for readjusting the valve. There is no additional pressure loss on the secondary side of the DHW heat exchanger with a thermostatic control. Therefore this type of regulation can be used by low pressure on the in the cold water mains.

Construction

All pipes are made of stainless steel. The connections are made by nuts and gaskets. The Termix One comes with a complete fully insulated cover thus minimizing the heat loss both during tapping of domestic hot water but also in standby mode.


FEATURES AND BENEFITS

- Instantaneous water heater
- DHW regulation with an accelerated thermostatic control
- Capacity: up to 65 kW on DHW
- DHW in sufficient quantity
- Operates independently of differential pressure and flow temperature
- Minimum space required for installation
- Pipes and plate heat exchanger made of stainless steel
- Minimized risk of lime scale and bacteria formation
- Low heat loss

CIRCUIT DIAGRAM – EXAMPLE

Termix One-B with complete insulation

- B Plate heat exchanger DHW
- 7 Thermostatic valve

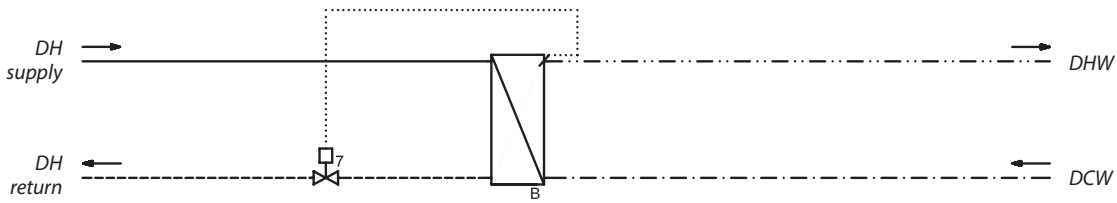

Technical parameters:

Nominal pressure: PN 16
 DH supply temperature: $T_{max} = 120\text{ °C}$
 DCW static pressure: $p_{min} = 0,5\text{ bar}$
 Brazing material (HEX): Copper


Weight: 10 – 12 kg (incl. packing)

Dimensions (mm): H435 x W355 x D195 (type 1+2)

Connections sizes: DH + DCW + DHW: G 3/4" (ext. thread)

- Connections:**
- 1 Domestic cold water (DCW)
 - 2 Domestic hot water (DHW)
 - 3 District heating (DH) supply
 - 4 District heating (DH) return

- Options:**
- Booster pump (increases DH flow)
 - Safety valve and non-return valve (10 bar)
 - Safety valve with thermostatic circulation set
 - Thermostatic circulation set
 - Non-return and pressure equalizer (GTU)

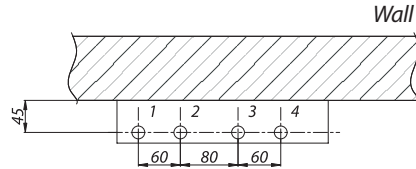

Seen from above

DHW: CAPACITY EXAMPLES, 10°C/50°C

Substation type	DHW capacity [kW]	Supply flow primary [°C]	Return flow primary [°C]	Pressure loss primary [kPa]	Flow rate secondary [l/h]	Substation type	DHW capacity [kW]	Supply flow primary [°C]	Return flow primary [°C]	Pressure loss primary [kPa]	Flow rate secondary [l/h]
Type 1 w/AVTB 15 1 household	29,3	60	23,0	20	630	Type 2 w/AVTB 20 up to 4 households	34,7	60	24,4	20	744
	38,2	60	25,2	45	822		47,1	60	26,8	45	1014
	37,8	70	20,0	20	816		45,1	70	21,3	20	972
	52,3	70	22,4	45	1128		65,6	70	23,8	45	1410

Gemina Termix A/S · Member of the Danfoss Group · Navervej 15-17 · DK-7451 Sunds · Denmark
 Tel.: +45 9714 1444 · Fax: +45 9714 1159 · mail@termix.dk · www.heating.danfoss.com

Danfoss can accept no responsibility for possible errors in catalogues, brochures and other printed material. Danfoss reserves the right to alter its products without notice. This also applies to products already on order provided that such alterations can be made without subsequential changes being necessary in specifications already agreed. All trademarks in this material are property of the respective companies. Danfoss and the Danfoss logotype are trademarks of Danfoss A/S. All rights reserved.