

Fact sheet

# Termix BVX-E RO SEK

Indirect substation for single-family houses or apartments



## Application

The Termix BVX-E RO SEK substation is a complete solution for hot water and space heating with optimal safety, efficient energy transfer, service-friendly construction and a compact design. The substation is used if a heat exchanger is required or on a conversion to district heating where the existing equipment is unsuitable for direct connection.

## District heating (DH)

The substation is prefabricated with a differential pressure controller, fitting piece and sensor pockets for insertion of a heat meter as well as strainers and ball valves.

## Heating (HE)

The heating circuit consists of a plate heat exchanger, safety valves, manometer, thermometers, ball valves, drain valve, air valves, expansion vessel and circulation pump. The temperature of the heating is electronically controlled with an outdoor temperature sensor.

## Domestic hot water (DHW)

The domestic hot water circuit consists of a hot water tank with coil and a pump for controlling the temperature with possibility for DHW priority. The DHW tank and coil are enamelled and the tank contains a magnesium anode.

## Options

The Termix BVX-E RO SEK can be supplied with a thermostatic circulation valve or a built-in non-return valve and safety valve mounted in the cold water supply. Both options delivered loose with unit.


## Construction

All pipes are made of stainless steel. The connections are made with nuts and gaskets. The Termix BVX-E RO SEK is completed by a white steel cover in a modern design with door and including external thermometers.

## FEATURES AND BENEFITS

- Substation for single-family houses or apartments
- DHW regulation with pump control
- Indirect heating with electronic control
- Capacity: 15–49 kW heating
- 100 or 150 ltr. tank for DHW
- Suitable in cases of low district heating capacity
- Operates independently of differential pressure and flow temperature
- Pipes and plate heat exchanger
- made of stainless steel

CIRCUIT DIAGRAM – EXAMPLE

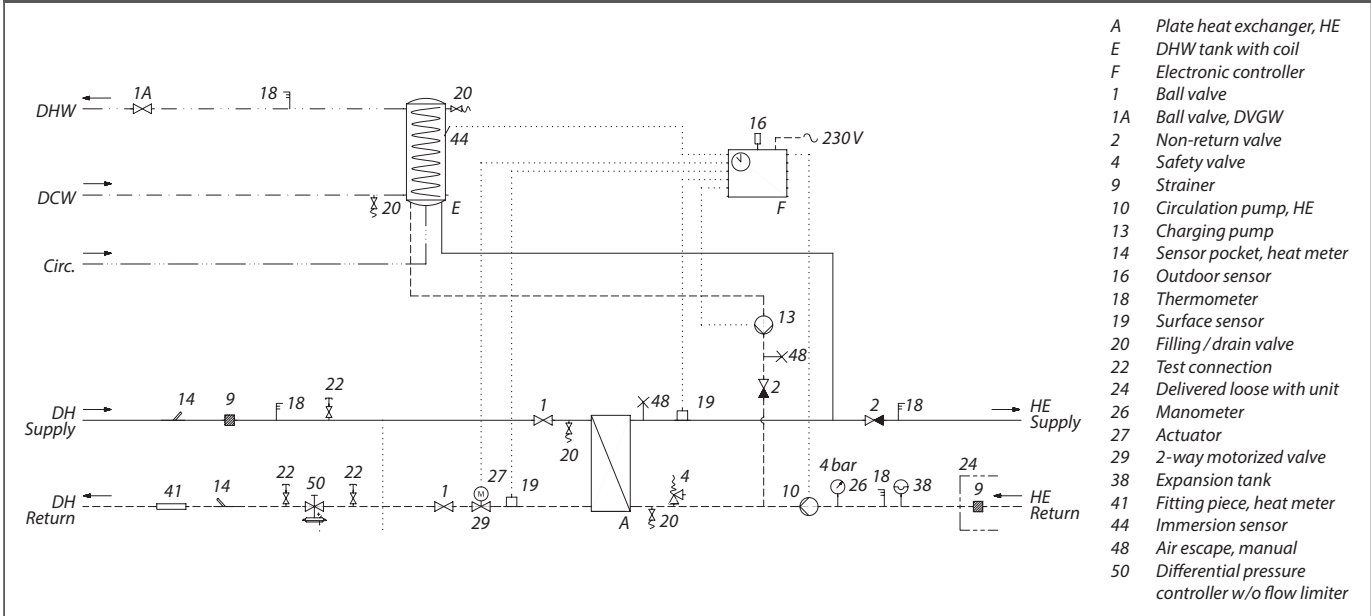

Technical parameters:


Nominal pressure: PN 16  
 Max. supply temperature:  $T_{max} = 120\text{ }^{\circ}\text{C}$   
 Brazing material (HEX): Copper

Weight incl. cover: 120 – 150 kg

Cover: White-lacquered steel sheet

Dimensions (mm):

With cover:  
 H 1580 × W 540 × D 640 (type BVX 1-x)  
 H 1890 × W 540 × D 640 (type BVX 2-x)

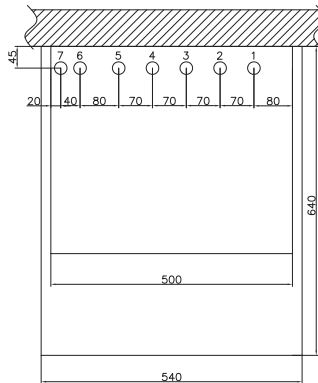

The connections are at the top of the station

Connections:

- District heating (DH) supply
- District heating (DH) return
- Heating (HE) supply
- Heating (HE) return
- Domestic cold water (DCW)
- Domestic hot water (DHW)
- DHW Circulation (Circ.)

Connections sizes:

DH + HE + DCW + DHW + Circ.: 3/4" G (int. thread)

Options:

- Thermostatic circulation set
- Ball valves set
- Thermometer
- Manometer
- Safety valve/non-return valve
- Pipe insulation

DHW: CAPACITY EXAMPLES, 10°C / 50°C

Substation type	Tank volume [l]	Coil supply/return temp. [°C]	DHW constant capacity [l/h]	DHW capacity first hour* [l/h]	DHW constant capacity [kW]
		70/30	245	305	11,4
		60/30	172	232	8,0
BVX 2-x	150	80/40	486	576	22,6
		70/30	245	335	11,4
		60/30	172	262	8,0

\* Output first hour = constant output + 60% of tank volume

HEATING: CAPACITY EXAMPLES

Substation type	$\Delta p$ [kPa]*	Temperature					
		70/40 – 35/60°C		80/45 – 40/70°C		90/45 – 40/70°C	
		Capacity [kW]	Flow [l/h]	Capacity [kW]	Flow [l/h]	Capacity [kW]	Flow [l/h]
BVX x-1	30	15	518	17	476	23	673
	35	16	555	18	510	25	724
BVX x-2	30	19	671	21	619	30	865
	35	21	718	23	662	32	929
BVX x-3	30	22	773	25	715	34	990
	35	24	828	27	765	37	1073
BVX x-4	30	30	1018	33	941	45	1306
	35	32	1089	35	1006	49	1404

\* Heat meter not included

Gemina Termix A/S · Member of the Danfoss Group · Navervej 15-17 · DK-7451 Sunds · Denmark  
 Tel.: +45 9714 1444 · Fax: +45 9714 1159 · mail@termix.dk · www.heating.danfoss.com

Danfoss can accept no responsibility for possible errors in catalogues, brochures and other printed material. Danfoss reserves the right to alter its products without notice. This also applies to products already on order provided that such alterations can be made without subsequent changes being necessary in specifications already agreed. All trademarks in this material are property of the respective companies. Danfoss and the Danfoss logotype are trademarks of Danfoss A/S. All rights reserved.