


Fact sheet

Termix distribution unit mini

The Termix distribution unit mini is the central hub of your heating installation.

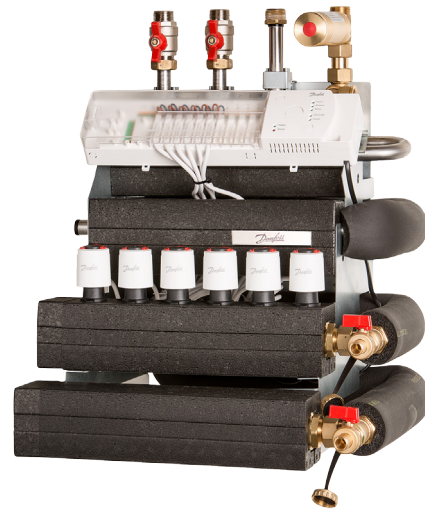

Your benefits:

- Flexible and compact design
- Custom solution
- Quick and easy assembly
- Complete and uniform installation
- Wireless underfloor heating control
- Easy servicing

The Termix distribution unit mini ensures correct distribution of radiator or underfloor heating in your installation along with your potable water and domestic hot water distribution. In short, all you need is to connect the Termix distribution unit mini to the radiator or underfloor heating circuits. Combined with the wireless Danfoss CF2 underfloor heating control, this is the ideal prefabricated solution for professional installers. The Termix distribution unit mini can be connected directly to Termix VMTD, Termix VMTD MIX, Termix VMTD MIX IE, Termix VVX, Termix BTD MIX RTV and Termix BVX RTV. The unit mini can be fitted with a Termix GTU pressure equalizer or safety valve as required.

Professional and easy choice

A Termix distribution unit mini ensures fast and simple connection of heating pipes when installing hidden pipework in new buildings.


Simple assembly and installation

The compact Termix distribution unit mini consists of a bracket fitted with a manifold for domestic water, radiators or underfloor heating. Fast coupling to the heat supply is achieved with the Termix district heating unit, which is prepared for direct connection to the distribution unit mini.

In addition to being time-saving, the easy assembly and installation is also your guarantee for perfect and consistent performance every time. The simple design of the Termix distribution unit mini also provides a quick service overview.

Reduce heat loss

The heat loss in the Termix distribution unit mini is reduced further by isolating the supply pipes for potable water and domestic hot water, underfloor heating or radiators. This also eliminates unnecessary energy consumption.

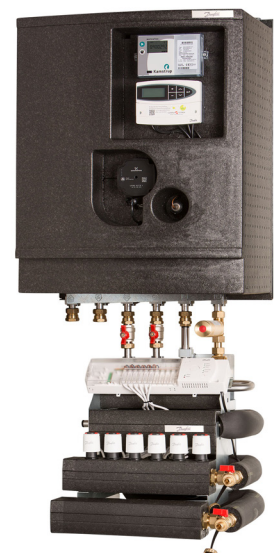

CONNECTIONS

Type	Cold Water	Domestic Hot Water	Underfloor heating	Radiator
Distribution unit mini A	6	6	6	-
Distribution unit mini C	6	6	-	6

TYPE DESIGNATION

Type	Draining/ filling	Cold Water	Domestic Hot Water	Danfoss CF2	Underfloor heating	Radiator	GTU pressure equalizer	Safety valve
Distribution unit mini A-GE	•	•	•	•	•		•	
Distribution unit mini A-SE	•	•	•	•	•			•
Distribution unit mini C-G	•	•	•			•	•	
Distribution unit mini C-S	•	•	•			•		•

Type codes:

A = Underfloor heating
C = Radiator circuit

Accessory codes:

G = GTU pressure equalizer
S = Safety valve
E = Danfoss CF2

1) Supplied with wireless room control for underfloor heating, complete with thermal actuators, room thermostats and receiver station.
Supplied as required with manual underfloor heating adjustment.

By default, the Termix distribution unit mini is fitted with connections for water and heating circuit (Ø15 x 2.5 mm) and underfloor heating (Ø20 x 2 mm).

Technical parameters:

Max. working pressure: 10 bar
Max. temperature: 110°C
Weight: Approx. 15 kg
Dimensions : Distribution unit mini:
H 515 x W 410 x D 470 mm*

Dimensions : Termix district heating unit with distribution unit mini:

	(H x W x D)	Type
VMTD:	1085 x 565 x 485 mm	C
VMTD MIX:	1085 x 565 x 485 mm	A, C
VMTD MIX: IE:	1265 x 565 x 485 mm	A, C
VVX:	1265 x 565 x 485 mm	A, C

* Standard dimensions

Note: Dimensions may vary according to the number of connections

Termix distribution unit mini - Danfoss CF2 control



Gemina Termix A/S · Member of the Danfoss Group · Navervej 15-17 · DK-7451 Sunds · Denmark
Tel.: +45 9714 1444 · Fax: +45 9714 1159 · mail@termix.dk · www.heating.danfoss.com

Danfoss can accept no responsibility for possible errors in catalogues, brochures and other printed material. Danfoss reserves the right to alter its products without notice. This also applies to products already on order provided that such alterations can be made without consequential changes being necessary in specifications already agreed.
All trademarks in this material are property of the respective companies. Danfoss and the Danfoss logotype are trademarks of Danfoss A/S. All rights reserved.