


Fact sheet

Termix One Solar

Domestic hot water module for flats, single-family houses and apartment buildings with up to 10 apartments

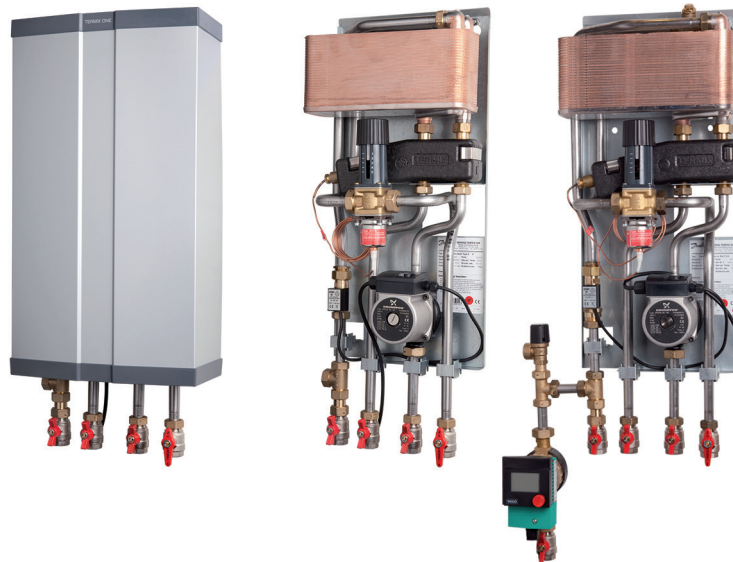

Application

The Termix One Solar is an instantaneous water heater, featuring superb heat extraction and high performance. The Termix One Solar is applicable for heating systems with buffer accumulators, solar systems or for other heat sources, where a very low return temperature is preferred. The water heater is available in three sizes, either for 1 apartment, for 1-4 apartments or for 5 up to 10 apartments. The large heat exchanger cools out the water in the primary return line very efficiently, thereby creating a very good operation economy. A flow switch in cold water mains is controlling the primary heating pump. An optional circulation pump together with a thermostat can maintain the circulating temperature at a desired temperature.

Domestic hot water (DHW)

The domestic hot water is prepared in the heat exchanger and the temperature is regulated with a thermostatic control valve. The patented sensor accelerator accelerates the closing of the thermostatic control valve and protects the heat exchanger against

overheating and lime scale formation. The sensor accelerator and the thermostatic control valve also works as a bypass keeping the heat exchanger and supply line warm. This shortens the waiting periods. The sensor accelerator helps to ensure a stable hot water temperature by varying loads, flow temperatures and differential pressure without the need for readjusting the valve. There is no additional pressure loss on the secondary side of the DHW heat exchanger with a thermostatic control. Therefore this type of regulation can be used by low pressure in the cold water mains.

Options

The water heater can be supplied with built in non-return valve and safety valve mounted in the cold water supply.


Construction

All pipes are made of stainless steel. The connections are made by nuts and gaskets. The Termix One Solar is delivered with an attractive steel grey cover in modern design, emphasising the high level of quality and comfort which characterises this product.

FEATURES AND BENEFITS

- Domestic hot water module
- DHW regulation with an accelerated thermostatic control
- Capacity: Up to 90 kW on DHW
- DHW in sufficient quantity
- Operates independent of differential pressure and flow temperature
- Minimum space required for installation
- Pipes and plate heat exchanger made of stainless steel
- Minimized risk of lime scale and bacteria formation

CIRCUIT DIAGRAM - EXAMPLE

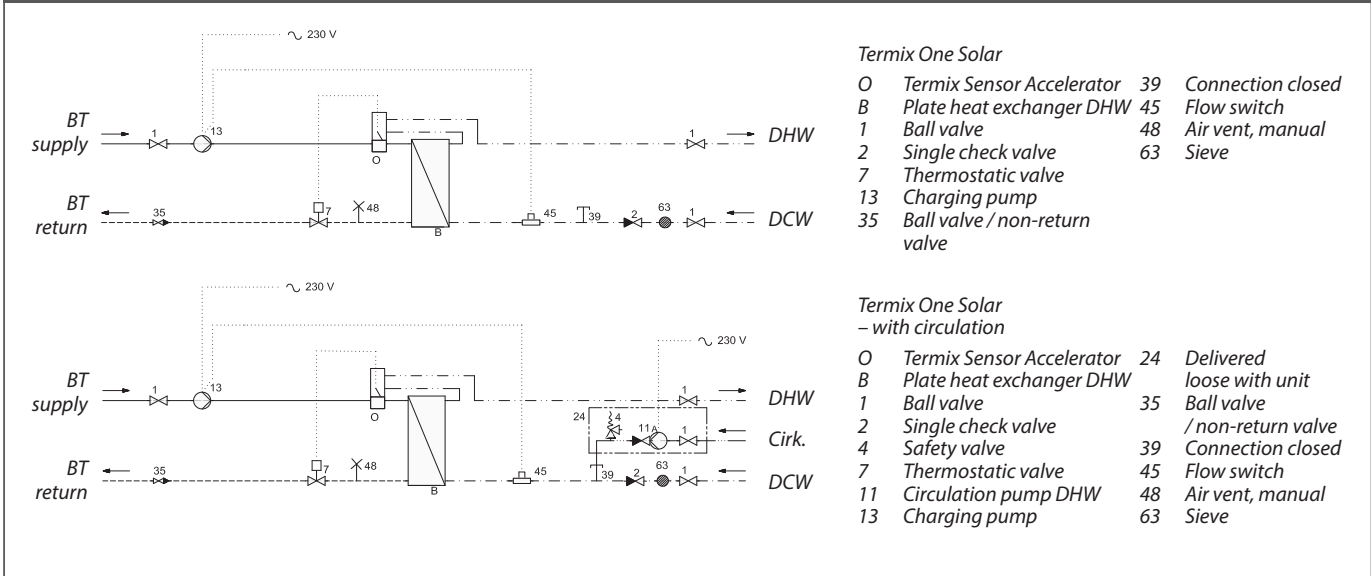

Technical parameters:

Nominal pressure: PN 16
 DH supply temperature: $T_{max} = 120\text{ }^{\circ}\text{C}$
 DCW static pressure: $p_{min} = 0,5\text{ bar}$
 Brazing material (HEX): Copper

With circulation:
 Without cover: H 960 × B 400 × T 190
 With cover: H 960 × B 400 × T 190

Connections:

- 1 Domestic cold water (DCW)
- 2 Domestic hot water (DHW)
- 3 Buffer tank (BT) supply
- 4 Buffer tank (BT) return
- 5 Circulation

Weight incl. cover:


20 kg
 (incl. packing)

Cover:

Grey-lacquered steel sheet

Dimensions (mm):

Without cover: H 760 × B 312 × T 155
 With cover: H 760 × B 315 × T 165
 Without cover, with circulation: H 935 × B 410 × T 150



Connections sizes:

All connections: G 3/4" (int. thread)

DHW: CAPACITY EXAMPLES, 10°C / 50°C

Substation type	DHW Capacity [kW]	Supply flow Primary [°C]	Return flow Primary [°C]	Pressure loss Primary [kPa]	Flow rate Secondary [l/h]	Substation type	DHW Capacity [kW]	Supply flow Primary [°C]	Return flow Primary [°C]	Pressure loss Primary [kPa]	Flow rate Secondary [l/h]
Type 1 w/AVTB 15 1 household	29,3	60	23,0	20	630	Type 2 w/AVTB 20 up to 4 households	34,7	60	24,4	20	744
	38,2	60	25,2	45	822		47,1	60	26,8	45	1014
	37,8	70	20,0	20	816		45,1	70	21,3	20	972
	52,3	70	22,4	45	1128		65,6	70	23,8	45	1410
Type 3 w/AVTB 20 5 to 10* households	60	60	23,0	35	1280	-	-	-	-	-	-
	66	60	24,0	45	1426	-	-	-	-	-	-
	80	70	20,3	35	1730	-	-	-	-	-	-
	90	70	21,0	45	1940	-	-	-	-	-	-

* Capacity for 10 households at 70 °C DH flow temperature

Gemina Termix A/S · Member of the Danfoss Group · Navervej 15-17 · DK-7451 Sunds · Denmark
 Tel.: +45 9714 1444 · Fax: +45 9714 1159 · mail@termix.dk · www.heating.danfoss.com

Danfoss can accept no responsibility for possible errors in catalogues, brochures and other printed material. Danfoss reserves the right to alter its products without notice. This also applies to products already on order provided that such alterations can be made without subsequent changes being necessary in specifications already agreed. All trademarks in this material are property of the respective companies. Danfoss and the Danfoss logotype are trademarks of Danfoss A/S. All rights reserved.